



ART 5213

merchant thermostatic mixing valve

SD 004 22-12-2025

Application

Thermostatic mixing valves are used to maintain the domestic hot water supplied to the user at a constant and safe temperature, when variations in the hot and cold water supply conditions and draw off flow rates occur.

The failsafe design shuts off the mixed water flow automatically in the event of disruption in the hot or cold water supply to the valve.

TMV3 and TMV2

The merchant range of fail safe thermostatic mixing valves have been designed and manufactured to meet the requirements of BS 7942:2000 and the National Health Service model engineering specification D 08 for use in healthcare premises, hospitals, care homes, and schools.

The elderly, young children and the disabled are at particular risk of life threatening scalds due to a potential lack of mobility, skin sensitivity or the ability to communicate with their carer.

The valve has been independently tested and approved as a type 3 valve under the TMV3 scheme.

The valve also meet the requirements of BS EN 1111: 2017 and BS EN 1287: 2017 and the TMV2 Type Scheme. The valves have been independently tested and approved as a type 2 valve under the TMV2 scheme by the WRc - NSF.


Merchant TMV2 thermostatic mixing valves are suitable for use in domestic housing and commercial building for single user outlets including wash basins, showers, baths and bidets but are also suitable for multiple outlet use.

Construction Details

Component	Material	Grade
Body	DZR - chrome plated	BS EN 12165 CW602N
Springs	Stainless steel	
Seals	EPDM	

Ref No	Size	Connection	Type
5213 Range			
CA-100822	15 mm	compression	Cu x Cu x Cu
CA-100824	22 mm	compression	Cu x Cu x Cu
CA-100827	15 mm	compression with MX valves	Cu x Cu x Cu
CA-100828	22 mm	compression with MX valves	Cu x Cu x Cu

Dimensions

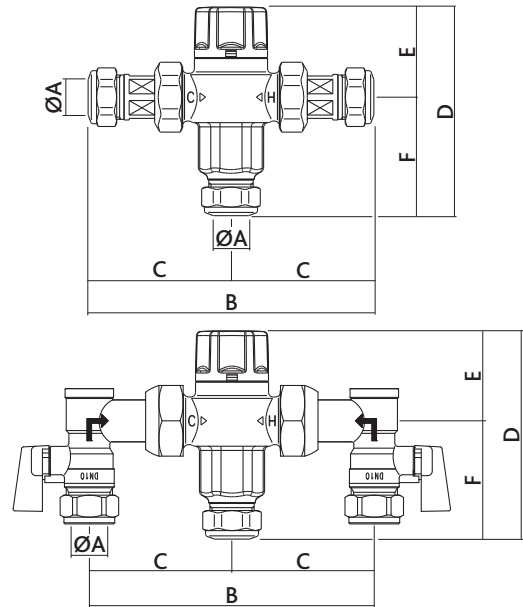

Ref No	ØA	B	C	D	E	F	kg
CA-100822	15	141	70.5	99	43	56	0.5
CA-100824	22	150	75	100	43	57	0.6
CA-100827	15	120	60	99	43	56	0.65
CA-100828	22	136	68	100	43	57	0.75

Technical Data

Max. working pressure:	10 bar - Static
Min. working pressure:	0.2 Bar : Dynamic
Max. inlet temperature:	85°C
Inlet temperature range - hot supply:	55 - 65°C
- cold supply:	0.5 - 20°C
D 08 working pressure - low pressure:	0.2 - 1.0
- high pressure:	1.0 - 5.0
Max. inlet pressure ratio (H/C or C/H):	5:1
Accuracy:	±2°C
Setting Range:	30 to 50°C
Min. temperature difference between inlet hot water and outlet mixed water:	10°C
Min. flow for stable operation	4 l/m
Kv value 15mm	1.35 m³/hr
22mm	1.37 m³/hr