

# ART 5213 & 5219

## OEM thermostatic mixing valve

SD 008 25-02-2026

### Application

Thermostatic mixing valves are used to maintain the domestic hot water supplied to the user at a constant and safe temperature, when variations in the hot and cold water supply conditions and draw off flow rates occur.

The Art 5213 and Art 5219 thermostatic mixing valves are designed primarily for single outlet use.

The valves are fail safe thermostatic mixing valves and provide a high volume of hot water at a stable temperature.

They delivers mixed hot water at a set temperature to taps, showers, baths and bidets making it ideal for use in domestic and commercial hot water systems.

### Operating Principle

The controlling element of the mixing valve is a temperature sensor fully immersed in the mixed water outlet port, which expands or contracts, continually maintaining the correct proportion of hot and cold water entering the valve.

Even when the supply pressures drop, due to draw off of hot and cold water by other users on the same system, or variations in the incoming water temperatures, the mixing valve automatically responds and maintains the mixed outlet water at the required temperature.

### Design

The valve has clean lines and is easy to clean, helping to improve and maintain hygiene standards.

The robust construction makes it suitable for exposed installation in public wash rooms and other commercial applications.

### BS EN 1287

The valves have been specifically designed and manufactured to meet the requirements of BS EN 1287: 2017.


The valves have been independently tested by WRc and certified as meeting the requirements of BS EN 1287:1999 for low pressure applications.

### Construction Details

| Component           | Material              | Grade              |
|---------------------|-----------------------|--------------------|
| Body                | Brass - chrome plated | BS EN 12165 CW617N |
| Internal components | Brass                 | BS EN 12164 CW614N |
| Seals               | EPDM                  |                    |
| Setting knob        | Nylon                 |                    |
| Compression screw   | Brass - chrome plated | BS EN 12164 CW614N |
| Olive               | Brass                 |                    |

| Ref No     | Size     | Connection  | Type                  |
|------------|----------|-------------|-----------------------|
| 521332 CST | G½/15 mm | compression | pre-set at 51°C       |
| 521931 CST | G½/15 mm | compression | adjustable 35 to 65°C |

### Dimensions

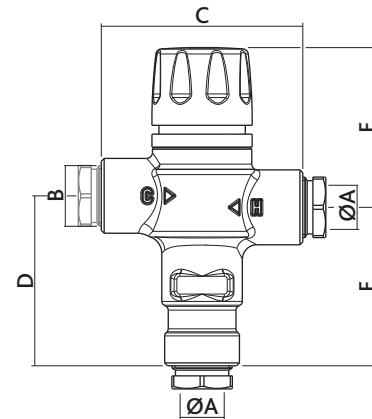


| Ref No     | ØA | B  | C  | D    | E    | F     | kg    |
|------------|----|----|----|------|------|-------|-------|
| 521332 CST | 15 | G½ | 73 | 60.5 | 56.5 | 53    | 0.344 |
| 521931 CST | 15 | G½ | 73 | 60.5 | 56.5 | 55-59 | 0.440 |

### Technical Data

|                                                                             |                 |
|-----------------------------------------------------------------------------|-----------------|
| Complies with;                                                              | BS EN 1287:2017 |
| Max. working pressure:                                                      | 10 bar - Static |
| Max. inlet temperature:                                                     | 85°C            |
| Max. inlet pressure ratio (H/C or C/H):                                     | 2:1             |
| Accuracy:                                                                   | ±2°C            |
| Setting Range:                                                              | 30 to 65°C      |
| Min. temperature difference between inlet hot water and outlet mixed water: | 15°C            |
| Min. flow rate for stable temperature:                                      | 5 l/m           |
| Compression ends:                                                           | BS EN 1254-2    |
| Threaded ends:                                                              | BS EN ISO 228/1 |

### Hydraulic Characteristics & Kv Value

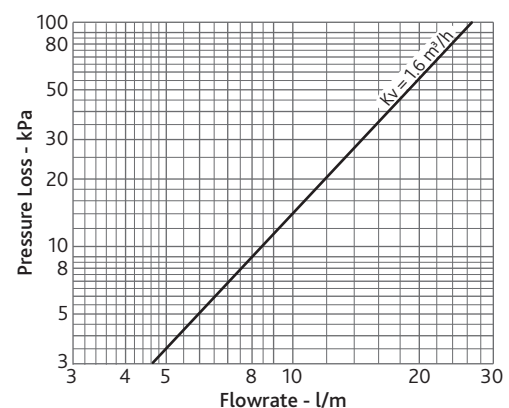

© Patents & Design Altecnic 2026

Altecnic Ltd retains all rights (including patents, designs and copyrights, trademarks and any other intellectual property rights) in relation to all information provided on or via the website, brochures or any other documents, including all texts, graphics and logos, contained on the website, in brochures or in any other documents published in the name of or on behalf of Altecnic Ltd in any form, without prior written consent of Altecnic Ltd.

The information provided in any product documentation, safety and technical information sheets is provided as general guidance only. It does not constitute professional advice and should not be relied on as such. We do not give any warranty or representation that the information is complete, up to date and correct. Similarly, all technical or installation guidance, whether verbal or written, is for informational purposes only. We provide this guidance in good faith but without warranty, as site conditions and the care and skill used in application are beyond our control. This does not affect your statutory rights. We have made every effort to ensure the accuracy of our product images; however, the images may not be to scale and might differ from the actual product.

Altecnic Ltd Francesco House, Staples Close, Stafford ST16 1WQ T: +44 (0)1785 218200 E: sales@altecnic.co.uk [altecnic.co.uk](http://altecnic.co.uk)

Registered in England No: 02095101 E & O.E © Altecnic Limited. 2026 ALTECNIC™