

PD15251

Vandal Resistant Shower
Head




SILFRA

altecnic
CALEFFI group

Vandal Resistant Shower Head

QK15051

Dimensions

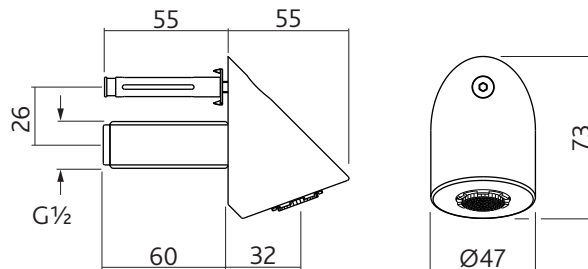

Installation

The vandal resistant shower head is design for a concealed supply behind a panel or wall and is ideal for communal facilities in schools, sports and leisure facilities and other areas where there is a risk of misuse.

The PD15251 shower head can be used with the QK15051 concealed shower valve or similar or via a thermostatic mixing valve

Technical Specification

Recommended operational pressure:	1 to 5 bar
Maximum test pressure:	16 bar
Maximum hot water temperature:	70°C
Recommended shower temperature:	41°C
Maximum shower temperature:	43°C
Thermal disinfection temperature:	Maximum 70°C for 4 min

© Patents & Design Altecnic 2020

Altecnic Ltd retains all rights (including patents, designs and copyrights, trademarks and any other intellectual property rights) in relation to all information provided on or via the website, brochures or any other documents, including all texts, graphics and logos, contained on the website, in brochures or in any other documents published in the name of or on behalf of Altecnic Ltd in any form, without prior written consent of Altecnic Ltd.

Altecnic Ltd Mustang Drive, Stafford, Staffordshire ST16 1GW

T: +44 (0)1785 218200 E: sales@altecnic.co.uk

Registered in England No: 2095101

altecnic.co.uk

AL 380 09-07-20

E & O.E

© Altecnic Limited. 2020

ALTECNIC™

altecnic
CALEFFI group