


# PVA34L

lockable isolation valve

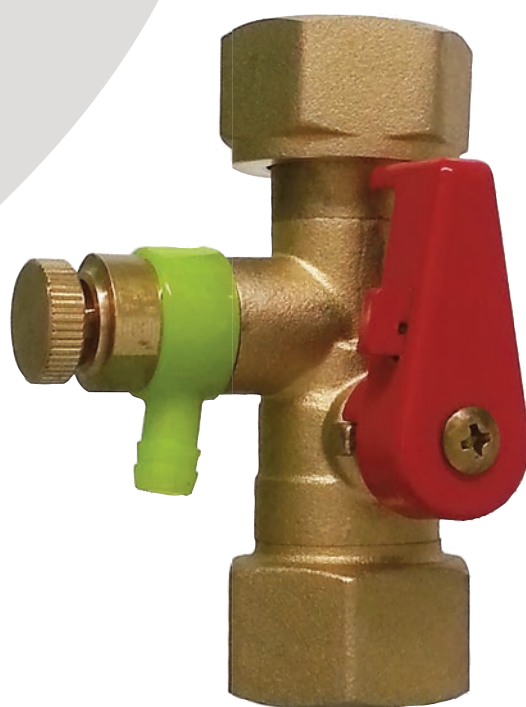

reflex

altecnic

# PVA34L lockable isolation valve



## Introduction

In an unvented domestic hot water system the expansion vessel is installed in the cold water supply pipe close to the hot water cylinder or calorifier or in the return to the boiler in heating systems.

Expansion vessels are designed to absorb the increase in volume of water created by thermal expansion as the temperature rises.

A domestic hot water system is a 'closed system' when it is isolated from the public water supply by a uni-directional valve such as a check valve, backflow preventer or pressure reducing valve.

To absorb the increase in volume of water within the storage cylinder provision must be made for the expansion by fitting a suitably sized expansion vessel.

As the pressure in the system changes the pre-charge pressure will allow water into the expansion vessel or force it out again.

## Shut-Off - Drain Valve

The PVA34L has been specifically designed to allow for the expansion vessel to be fitted easily and conveniently to the system.

The compact design requires a minimum of space and includes several useful features.


The valve has a female union connection to fit to the expansion vessel and a female connection to connect to the pipework making a secure joint.

The ball valve allows the expansion vessel to be isolated from the system.

The lever has a button operated safety feature which prevents accidental isolation, which could cause a major safety hazard.

The drain feature allows the expansion vessel to be drained of liquid should the expansion vessel need to be removed for any reason, minimising any water spillage during removal.

## Dimensions

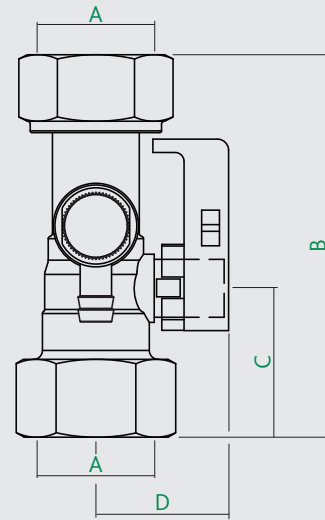

Prod Code	A	B	C	D	kg
PVA34L	G $\frac{3}{4}$	86	34	30	

The PVA34L valve enable 3 functions to be performed easily.

- A union connection for easy fitting
- Isolation should the expansion vessel need to be removed
- Drain facility to allow the expansion vessel to be drained without draining the circuit or system.

## Technical Specification

Max. working pressure:	10 bar
Max. operating temperature:	120°C
Connection threads:	BS EN ISO 228
Body material:	Brass BS EN 12420 CW617N

© Patents & Design Altecnic 2020

Altecnic Ltd retains all rights (including patents, designs and copyrights, trademarks and any other intellectual property rights) in relation to all information provided on or via the website, brochures or any other documents, including all texts, graphics and logos, contained on the website, in brochures or in any other documents published in the name of or on behalf of Altecnic Ltd in any form, without prior written consent of Altecnic Ltd.

Altecnic Ltd Mustang Drive, Stafford, Staffordshire ST16 1GW

T: +44 (0)1785 218200 E: sales@altecnic.co.uk

Registered in England No: 2095101

altecnic.co.uk

AL 265 08-10-20

E & O.E

© Altecnic Limited. 2020

ALTECNIC™